




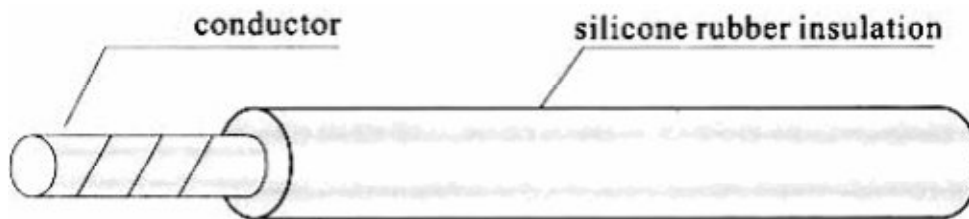






China Sanew Cable Co., Ltd.

UL3123 Silicone Rubber Insulation Wire

Product Features: Excellent physical and mechanical strength properties.	Recommended applications: For use in motor leads, appliances, lighting fixtures, high temperature electronic applications. Most every high temperature application where flexibility is required.
--	---



TECHNICAL DATA:

 Min. bend radius for installation:	5 x cable diameter
 Temperature range:	-60°C to +150°C
 Working Voltage:	600V
 Test Voltage:	2000V
 Conductor stranding:	Tin-coated, nickel-coated, silver-coated copper wire
 Color Code:	White, Black, Red, Yellow, Green, Blue, Brown, Yellow/Green.(Other colors available on request)
 Approvals:	According to UL758, UL1581 UL VW-1

Add: 2-1-101, Binhefang, Daxing District, Beijing, China

Zip: 102600

Tel: +86 - 10 -51265801

E-mail: international@sanew-cable.com

Fax: +86 - 10 -51286576



China Sanew Cable Co., Ltd.

UL3123 Silicone Rubber Insulation Wire

Conductor		Insulation			Maximum Resistance At 20°C Ω/km	Reference weight kg/km
Size AWG	Stranding No./mm	Nominal Thickness (mm)	Nominal O.D. (mm)	Maximum Dia. (mm)		
30	7/0.10	0.8	1.9	2.1	364.0	3.8
28	7/0.12	0.8	2.0	2.2	252.0	4.3
26	7/0.16	0.8	2.1	2.3	143.0	4.6
24	7/0.20	0.8	2.2	2.4	92.0	5.7
22	7/0.26	0.8	2.4	2.6	56.8	8.3
20	7/0.32	0.8	2.56	2.76	40.1	10.4
18	7/0.40	0.8	2.8	3.0	23.0	14.6
16	7/0.50	0.8	3.1	3.3	14.6	20

Add: 2-1-101, Binhefang, Daxing District, Beijing, China

Zip: 102600

Tel: +86 - 10 -51265801

E-mail: international@sanew-cable.com

Fax: +86 - 10 -51286576